

**isc Silicon NPN Power Transistor**
**BD201/203**
**DESCRIPTION**

- Collector-Emitter Breakdown Voltage-  
:  $V_{(BR)CEO} = 45V(\text{Min})$ - BD201  
60V(Min)- BD203
- Complement to Type BD202/204
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

**APPLICATIONS**



- Designed for use in hi-fi equipment delivering an output of 15 to 15 W into a 4  $\Omega$  or 8  $\Omega$  load.

**ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )**

SYMBOL	PARAMETER	VALUE	UNIT	
$V_{CBO}$	Collector-Base Voltage	BD201	60	V
		BD203	60	
$V_{CEO}$	Collector-Emitter Voltage	BD201	45	V
		BD203	60	
$V_{EBO}$	Emitter-Base Voltage	5	V	
$I_C$	Collector Current-Continuous	8	A	
$I_{CM}$	Collector Current-Peak $t_p \leq 10\text{ms}$	12	A	
$I_{CSM}$	Collector Current-Peak $t_p \leq 2\text{ms}$	25	A	
$I_B$	Base Current	3	A	
$P_C$	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	60	W	
$T_J$	Junction Temperature	150	$^\circ\text{C}$	
$T_{stg}$	Storage Temperature Range	-65~150	$^\circ\text{C}$	

**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	2.08	$^\circ\text{C/W}$
$R_{th\ j-a}$	Thermal Resistance, Junction to Ambient	70	$^\circ\text{C/W}$

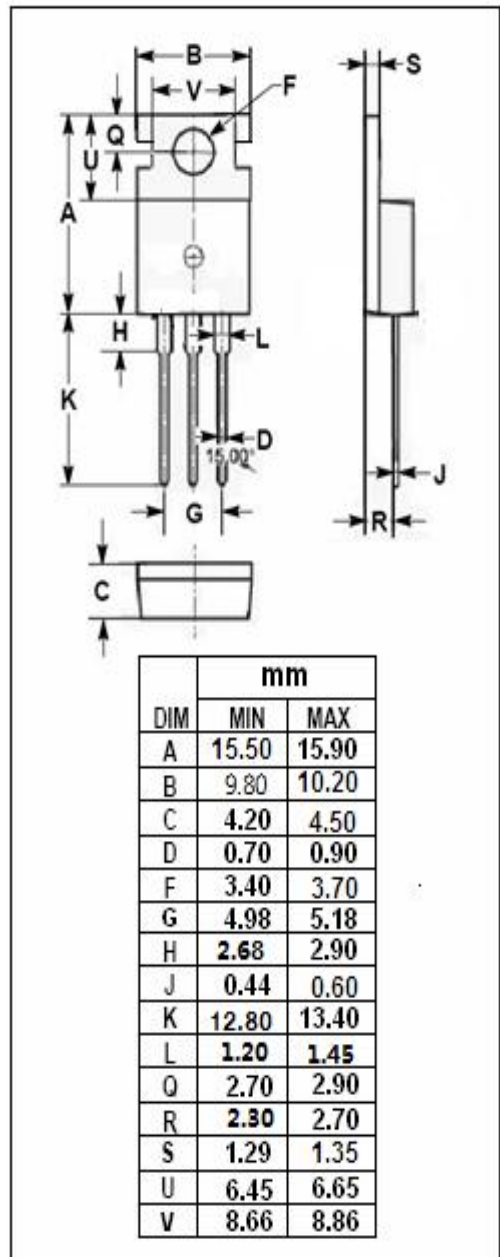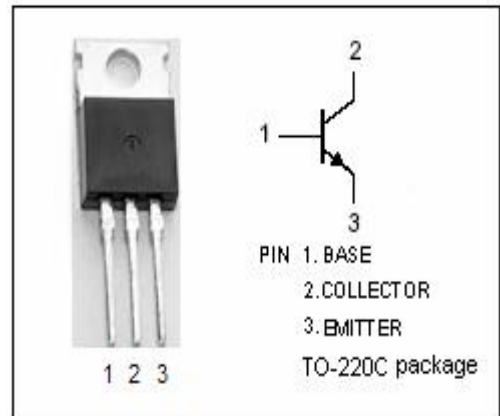

## isc Silicon NPN Power Transistor

BD201/203

## ELECTRICAL CHARACTERISTICS

 $T_C=25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	BD201	$I_C= 50\text{mA}; I_B= 0$	45		V
		BD203				
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage		$I_C= 1\text{mA}; I_E= 0$	60		V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage		$I_E= 1\text{mA}; I_C= 0$	5		V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage		$I_C= 3\text{A}; I_B= 0.3\text{A}$		1.0	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage		$I_C= 6\text{A}; I_B= 0.6\text{A}$		1.5	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage		$I_C= 6\text{A}; I_B= 0.6\text{A}$		2.0	V
$V_{BE(on)}$	Base-Emitter On Voltage		$I_C= 3\text{A}; V_{CE}= 2\text{V}$		1.5	V
$I_{CEO}$	Collector Cutoff Current		$V_{CE}= 30\text{V}; I_B= 0$		0.2	mA
$I_{CBO}$	Collector Cutoff Current		$V_{CB}= 40\text{V}; I_E= 0; T_J= 150^\circ\text{C}$		1.0	mA
$I_{EBO}$	Emitter Cutoff Current		$V_{EB}= 5\text{V}; I_C= 0$		0.5	mA
$h_{FE}$	DC Current Gain	BD201	$I_C= 3\text{A}; V_{CE}= 2\text{V}$	30		
		BD203	$I_C= 2\text{A}; V_{CE}= 2\text{V}$			
$f_T$	Current-Gain—Bandwidth Product		$I_C= 0.3\text{A}; V_{CE}= 3\text{V}, f_{test}= 1.0\text{MHz}$	7.0		MHz
Switching Times						
$t_{on}$	Turn-On Time		$I_C= 2\text{A}; I_{B1}= I_{B2}= 0.2\text{A}$		1	$\mu\text{s}$
$t_{off}$	Turn-Off Time				4	$\mu\text{s}$

**NOTICE:**

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.