



## PNP BDT82 – BDT84 – BDT86 – BDT88

### SILICON POWER TRANSISTORS

The BDT82 – BDT84 – BDT86 – BDT88 are epitaxial base transistors in a TO-220 plastic envelope.

They are intended for use in audio output stages and general amplifier and switching applications.

NPN complements are BDT81 – BDT83 – BDT85 – BDT87.

Compliance to RoHS.

#### ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit	
$V_{CEO}$	Collector-Emitter Voltage	$-I_B = 0$	BDT82	-60	V
			BDT84	-80	
			BDT86	-100	
			BDT88	-120	
$V_{CBO}$	Collector-Base Voltage	$-I_E = 0$	BDT82	-60	V
			BDT84	-80	
			BDT86	-100	
			BDT88	-120	
$V_{EBO}$	Emitter-Base Voltage	$-I_C = 0$	-7	V	
$I_C$	Collector Current		-15	A	
$I_{CM}$	Collector Peak Current		-20	A	
$I_B$	Base Current		-4	A	
$P_t$	Total Power Dissipation	@ $T_C = 25^\circ$	125	W	
$T_J$	Junction Temperature		150	$^\circ\text{C}$	
$T_{Stg}$	Storage Temperature		-65 to +150	$^\circ\text{C}$	

#### THERMAL CHARACTERISTICS

Symbol	Ratings	Value	Unit	
$R_{thJa}$	Thermal Resistance, Junction to Ambient		70	K/W
$R_{thJmb}$	Thermal Resistance, Junction to Mounting Base		1	K/W



## PNP BDT82 – BDT84 – BDT86 – BDT88

### ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted

Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit		
$I_{CBO}$	Collector Cutoff Current	$I_E=0A, V_{CB} = -60 V$	-	-	-0.2	mA		
		BDT82						
		$I_E=0A, V_{CB} = -80 V$						
		BDT84						
$I_{CES}$	Collector Cutoff Current	$V_{BE}=0, V_{CE} = -60V$	-	-	-1	mA		
		BDT82						
		$V_{BE}=0, V_{CE} = -80V$						
		BDT84						
$I_{EBO}$	Emitter Cutoff Current	$V_{EB} = -7 V$ $I_C=0$	-	-	-0.1	mA		
							BDT86	
							BDT88	
							BDT82	
$h_{FE}$	DC Current Gain (*)	$I_C = -50mA$ $V_{CE} = -10V$	40	-	-	-		
							BDT82	
							BDT84	
							BDT86	
		$I_C = -5A$ $V_{CE} = -4V$	40	-	-	-	-	
								BDT82
								BDT84
								BDT86
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage (*)	$I_C = -5A$ $I_B = -0.5A$	-	-	-1	V		
							BDT82	
							BDT84	
							BDT86	
		$I_C = -5A$ $I_B = -0.5A$	-	-	-1.6		-	
								BDT82
								BDT84
								BDT86
$V_{BE}$	Base-Emitter Voltage (*)	$I_C = -7A$ $I_B = -0.7A$	-	-	-1.5	V		
							BDT82	
							BDT84	
							BDT86	



## PNP BDT82 – BDT84 – BDT86 – BDT88

### ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted

Symbol	Ratings	Test Condition(s)Sec	Min	Typ	Max	Unit
$I_{S/B}$	Second breakdown collector current	$V_{CE} = -50 \text{ V}$ , $t_p = 100 \text{ ms}$	-2.5	-	-	A
$f_T$	Transition frequency	$V_{CE} = -10 \text{ V}$ , $I_C = -0.5 \text{ A}$ , $f = 1 \text{ MHz}$	-	20	-	MHz
$t_{on}$	Turn-on time	$I_C = -7 \text{ A}$	-	-	1	$\mu\text{s}$
$T_{off}$	Turn-off time	$I_{B1} = -I_{B2} = -0.7 \text{ A}$	-	-	2	


(\*) Pulse Duration = 300  $\mu\text{s}$ ,  $\delta \leq 2\%$



## PNP BDT82 – BDT84 – BDT86 – BDT88

### MECHANICAL DATA CASE TO-220

DIMENSIONS (mm)		
	Min.	Max.
A	9,90	10,30
B	15,65	15,90
C	13,20	13,40
D	6,45	6,65
E	4,30	4,50
F	2,70	3,15
G	2,60	3,00
H	15,75	17,15
L	1,15	1,40
M	3,50	3,70
N	-	1,37
P	0,46	0,55
R	2,50	2,70
S	4,98	5,08
T	2,49	2,54
U	0,70	0,90

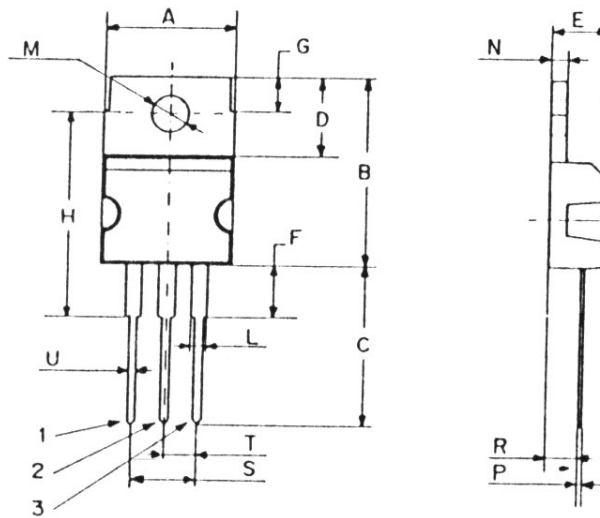

Pin 1 :	Base
Pin 2 :	Collector
Pin 3 :	Emitter
Package	Collector

Revised October 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may results from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.